

# MiFleet + Vision Quick Start Guide

Full HD Dual Camera - Dash Cam Solution


## QUICK DEVICE INSTALL - START HERE

1. Remove all contents from box.
2. Verify parts list inventory (Fig. 1).

Fig. 1

Part Image	Description	Total Parts
	Forward Exterior Facing Camera	1
	Driver Interior Facing Camera	1
	External GPS Module	2
	10 PIN Power Cable	1
	Star Torque Wrench	1
	4G Antennas (only with 4G device)	1
	Carrier SIM Card	1
	SD Card	1

3. Open side panel of exterior facing camera using star torque wrench.
4. Verify SIM & SD card are inserted correctly.

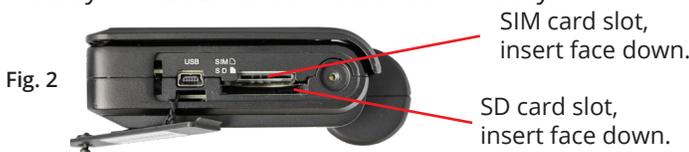


5. Verify all connections are tight and correct based on figure 3 & 4 below.



**PLEASE NOTE:** We highly suggest that you have a professional installer perform these steps to insure accuracy with device installation and furthermore to ensure vehicle health upon completion of installation. MiFleet or it's affiliates are **NOT RESPONSIBLE** for any damage to any vehicle with installed equipment.

1. **Clean windshield - DO NOT SKIP STEP**
2. Mount both cameras temporarily by peeling off 3M sticky tape on the back and applying camera gently to windshield in specified locations.
3. Neatly tuck hard wiring cables under roof liner on interior vehicle roof fabric over to driver side door **(Green Line Fig. 5).**
4. Bring cables down through back side of dashboard paneling down to reach vehicle fuse box **(Blue Line Fig. 5).**
5. Connect device power to proper fuse connections; black to ground, red to 12V power, and yellow to ACC 12V ignition.
6. Choose either left or right side of windshield to mount antennas. Peel the 3M sticky tape off the back side and firmly stick antennas to windshield.
7. Tuck antenna cords under interior lining on roof just like in step 3 **(Yellow Line Fig. 5).**
8. Mount GPS module to dashboard by peeling off the 3M sticky tape and press firmly.
9. Bring cables up right side of vehicle and tuck behind interior lining **(Pink Line Fig. 5).**
10. Device is now installed into vehicle, please continue to camera configuration on reverse side.

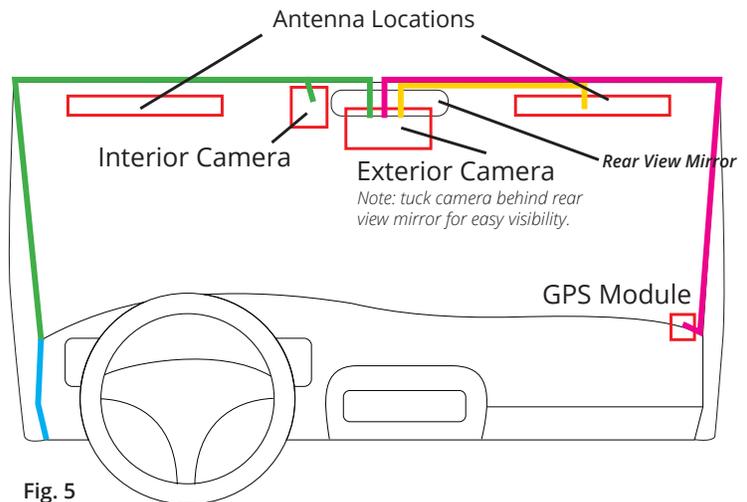



## MiFleet + Vision Quick Start Guide

Full HD Dual Camera - Dash Cam Solution

## QUICK DEVICE INSTALL - CONTINUED


### Quick Device Setup:

1. Access your Apple or Android play store.
2. Search for Veyes App in your app search bar.
3. Download Veyes App using tablet or computer to configure camera.
4. Open Veyes App on tablet or computer.
5. Click allow to **ALL** prompts that ask for permissions.

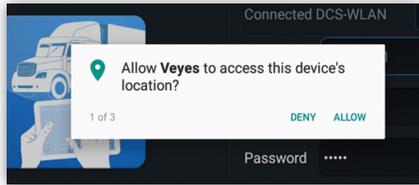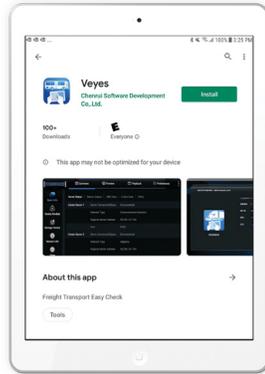


**NOTE:** *if you have already installed camera this step is done. If you have not installed camera, please install camera now.*

6. Turn vehicle ignition on, device will power on into hotspot mode. You will have 3 mins to connect to camera. If you are unable to connect the camera, turn ignition off and then back on. **Wait for red light to change to flashing green before proceeding to next step.**
7. In Veyes App, click on search bar on upper right hand corner of screen to find the camera's serial number. If number does not show, click refresh until it appears in search bar.

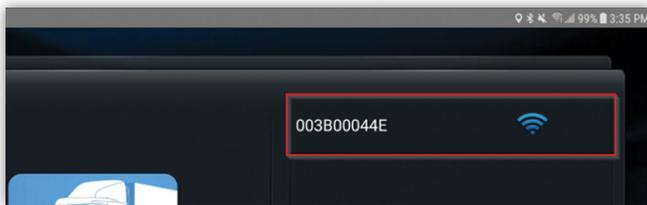

8. Veyes App will then ask for a username and password. Both your user name and password will be **admin**.
9. Click on **PREFERENCES TAB** top right hand corner, then click on **NETWORK** on left side of screen.

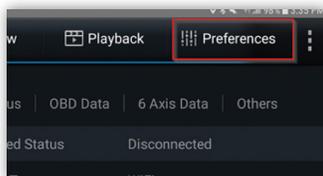

10. For **WIFI ONLY DEVICES** - click on WiFi tab and enter in your local WiFi or hotspot user name and password. **Click save once complete.**
11. For **LTE 4G DEVICES ONLY** - select the **COMMUNICATIONS TAB** and **ENTER YOUR APN INFO** printed on sticker located on shipping box. May require your personal username and password depending on your specific settings. **Click save once complete.**
12. Logout of app by clicking on menu icon located in upper right hand corner shown as three dots.
13. Device is now ready to use. Turn vehicle ignition off, wait 1 min then turn ignition back on. Your MiFleet + Vision device will now show in your existing MiFleet account. You may now uninstall Veyes app as it is no longer needed for future use.

### Adjusting Camera View:

1. Adjust external facing camera with provided star torque wrench and camera screws on device by loosening screw and moving camera front to back.
2. Login to your MiFleet account by going to: **Login.MiFleet.US**
3. Use your personal MiFleet username and password to log into your MiFleet account. This may be your company MiFleet account username and password.
4. Select on your apps in the upper right corner.
5. MiFleet + Vision App will appear in your apps section on your MiFleet account.
6. Select MiFleet + Vision icon as shown.
7. Once in MiFleet + Vision, click on LiveView located in upper left hand corner of screen to see your cameras live streaming video. You can now make any final adjustments before tightening screws to hold cameras in place.

